






Data Sheet Number **KA-DATA-010**  
 CRM12ARROW001 **M12 4 Pole Female PG9 2 wire (pins 1 and 4)**

**Face View**  
4 Pole 2 wire

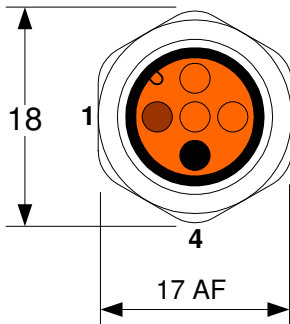

- 1: Brown
- 4: Black

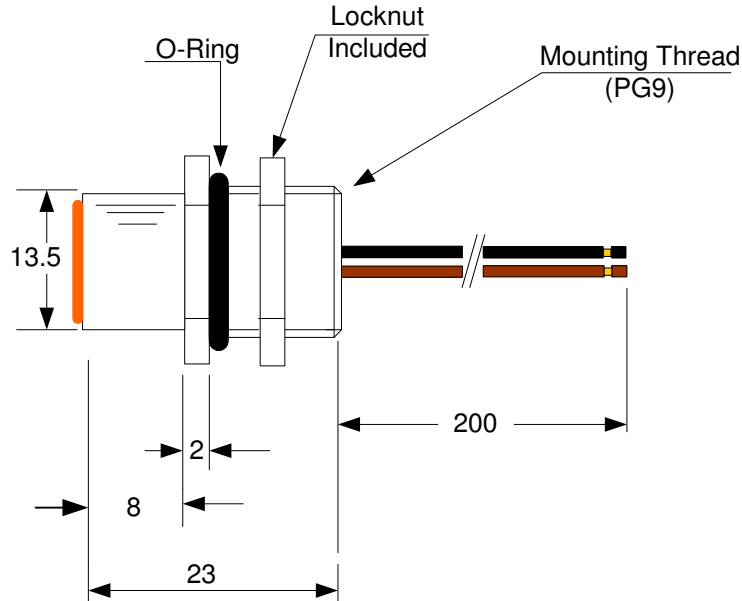

**Material Specification:**

- Body: Brass, bright nickel plated
- Insert: PU R3000
- Contact: Brass, Gold over Nickel Plated
- Wires: PVC 0.34mm Stranded
- O-Ring: Internal 'Viton'
- O-Ring: External 'Nitrile'
- Resin: PU Composite

**Electrical Specification:**

- Protection: IP68
- Operating Voltage: 250 VAC / VDC (3 and 4 Pole)
- Current: 4 Amps
- Operating Temperature: -20C to +80C

**Customer Sign-Off**

<b>Customer:</b>	<b>Arrow Valley Automation</b>
<b>Date:</b>	<b>Signed:</b>
<b>Print name:</b>	

**Note:**

All Dimensions are for Reference Only

Rev	Rev	Rev	Rev	Rev
A	xxx	xxx	xxx	xxx

**Knect Assemblies Ltd**

First Avenue, Trecenydd,  
 Caerphilly. CF83 2SD Tel: +2920 881130



**CRM12ARROW001**

Drawn By: Jeff Reynolds  
 Date: 01/07/2010

**KA-DATA-010**